



A.B.N. 67 054 007 162
HAZPAK PTY LTD 44 Stephen Rd, Dandenong South Vic. 3175 Australia
Postal Address: P.O. Box 4000, Dandenong South Vic. 3164 Australia
Tel: (03) 9706 8058 Fax: (03) 9706 7593 Intl. Tel: 61 3 9706 8058
E-mail: hazpak@hazpak.com.au

PRODUCT INFORMATION


PRODUCT CODE: GP-4G8-IP2-1x0.5L-58 (GP-C-HDPE-500) **PRODUCT TYPE:** UN Approved DG packaging

DESCRIPTION: Dangerous Goods Approved Combination Package with fibreboard outer box, fibreboard stabilising inserts, liner bag, 500 mL HDPE rectangular jar with 58 mm closure with annular gasket & orientation labels for the transport of Dangerous Goods. IATA Compliant. Can be used for liquids and solids.

PHOTOGRAPHS



Inner Package

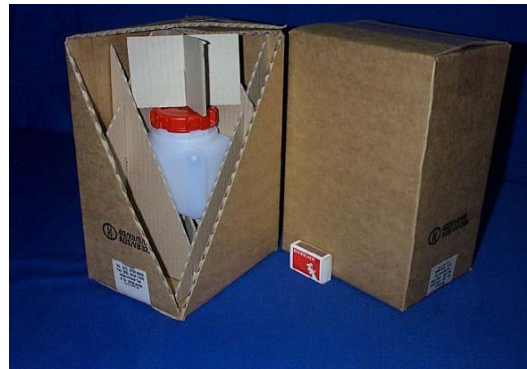

Combination Package

FALCON TEST ENGINEERS REPORT No: 3450

ASSEMBLY & CONFIGURATION OF PACKAGING:

Place the filled inner packaging into the box. Ensure that it is in a stable upright position and that it is seated firmly on the base 'X' insert. Place the top cross 'X' insert over the inner packaging. Seal plastic bag with a "goose-neck tie". (Twist slack of bag tightly, fold over so that it forms a neck, and secure with elastic bands). Tuck neck into box. Close and seal the box with 48 mm pressure sensitive self adhesive tape in the same manner that the base of the box has been sealed. Add the required amount of absorbent material if specified. Label the box as required.

(Make sure that the labels or any other markings are not obliterated or obscured in any way).

Note: The use of other packaging methods or components may render the approval of this package invalid.

MARKINGS & APPROVAL:

Approval No.: 3280
UN Markings: UN 4G/X9/S/##/AUS/VB3280
Packaging Group: I, II & III
S.G.: 1.6
Internal Test Pressure: 180 kPa

PRODUCT DIMENSIONS:

Dimensions: 195 (L) x 140 (W) x 300 (H) mm **Mass of Empty Package:** 347g
Nominal Volume 0.008 m³ per unit
Bulk Equivalent: 2 kg (@ 250 kg/m³)